



2022

TAKING INNOVATION TO NEW DEPTHS



bigblue®

THE BRIGHTER IDEA



C o n t e n t

AL250	P.82	Camera Arms	P.104	Gloves, Hoods & Handles	P.99	VL4600P	P.30
AL250 Camouflage	P.73	Camera Clips & Accessories	P.104	HL450N	P.89	VL4600PB	P.14
AL450WM Tail	P.80	Camera Trays	P.94	HL450XW	P.89	VL9000P Tri Color	P.28
AL450WM Tail Camouflage	P.72	Camera Filters	P.91	HLI000N	P.88	VLI1000P	P.26
AL450NM Tail II	P.81	CB4000P	P.42	HLI000XW	P.88	VLI0000PBRC	P.8
AL450NM Tail II Camouflage	P.71	CB7200P	P.40	Light Filters	P.100	VLI8000P Pro Mini	P.24
AL450 Strobe	P.69	CB7200PB	P.12	Light Head	P.63	VLI8000PBRC	P.4
ALI200RAFO	P.79	CB10000P	P.38	Outdoor Dry Bags	P.102	VLI8000P Pro Mini Tri Color	P.22
ALI300NP	P.76	CB10000PBRC	P.10	Optical Fibre	P.99	VL36000P	P.20
ALI300NP Camouflage	P.70	CB15000P	P.36	Protective Case Series	P.90	VL33000PRC	P.2
ALI200NP IR	P.17	CB15000PBRC	P.6	RGB White II	P.83	VL65000P	P.18
ALI300WP	P.77	CB30000P II	P.34	Red Spot Light & Green Spot Light	P.90	VTL2600P	P.53
ALI200WP IR	P.17	CB60000P	P.32	Snoots	P.100	VTL4200P	P.52
ALI300XWP	P.78	CF450M	P.86	Sport Water Bottle	P.107	VTL8000P	P.50
ALI300NP Tail	P.74	CFI200P II	P.85	Spring Cord	P.101	VTL8000P Max	P.46
ALI300WP Tail	P.75	CFI800P	P.84	TL2600P	P.62	VTL8000P Backmount / Sidemount	P.48
ALI300 Strobe	P.68	Chargers	P.97	TL3800P	P.61	VTLI0000P	P.44
ALI800NP II	P.66	Combo Packs	P.92	TL3800P Supreme	P.60		
ALI800WP	P.67	Controller	P.98	TL5200P	P.58		
ALI800P Tri Color II	P.65	Easy Clip Lights	P.87	TL5200P Backmount / Sidemount	P.56		
AL2600XWP II	P.64	Easy Release Mount Series	P.102	TL8000P	P.54		
AL2600XWPB	P.16	Float Arms, Flexi Arms	P.103				
Ambient Filters	P.98	Fluorodive Kits	P.91				
Backpack	P.106						
Batteries	P.96						



VL33000 PRC

Li ion Rechargeable Battery Ultra Power LED Video Light with Remote Control Option



33000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

1. 4 levels of brightness 1 level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Easy to change up the battery pack BATCELL21700x8
4. Built-in red color led enhances focusing performance
5. 45pcs XML LED to provide 33000 lumens
6. Comes with ball joint for easy system setup
7. Place to insert the optical fibre
8. Comes with protective case for VL33000PRC
9. Ergonomic aluminum handle comes in a package
10. Optical fibre. Sold separately.
11. Controller kit set. Sold separately.
12. Set-up for the Controller.

SPECIFICATIONS

Light source	45 x XML LED + 10 x XPE Red LED
Light output	3300 Lm (level I), 8250 Lm (level II) 16500 Lm (level III), 33000 Lm (level IV)
Light output (Red color mode)	1200 Lm
Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL21700x8
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 85 x L. 144.6mm
Weight in air	1391 g (including battery)
Buoyancy in seawater	-597 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass

SPECIFICATIONS for CONTROLLER

Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	CR2032x2
Maximum depth	100 m tested
Size	Dia. 30 x L. 98.3mm
Weight in air	110 g (including battery)
Buoyancy in seawater	-51 g (including battery)
Switching system	Push button with battery indicator



VL18000 PBRC

Li ion Rechargeable Battery
Super Power LED Video Light
with Blue Light with Remote
Control Option



Fluorodiving Performance



18000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

1. 3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELL18650x7 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance
5. Built-in blue color led for fluorodiving performance. Go with yellow plate for better result.

6. Ergonomic aluminum handle comes in a package
7. 24pcs XML LED to provide 18000 lumens
8. Comes with ball joint for easy system setup
9. Comes with protective case for VL 18000PBRC
10. Comes with yellow plate.
11. Optical fibre. Sold separately.
12. Controller kit set. Sold separately.
13. Set-up for the Controller.




SPECIFICATIONS

Light source	24 x XML LED + 8 x XPE Red LED + 14 x XPE Blue LED
Light output	4500 Lm (level I), 9000 Lm (level II), 18000 Lm (level III)
Light output (Red color mode)	1000 Lm
Light output (Blue color mode)	113 Lm (level I), 225 Lm (level II), 450 Lm (level III)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x7
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 142.5mm
Weight in air	774 g (including battery)
Buoyancy in seawater	-291 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included

SPECIFICATIONS for CONTROLLER

Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	CR2032x2
Maximum depth	100 m tested
Size	Dia. 30 x L. 98.3mm
Weight in air	110 g (including battery)
Buoyancy in seawater	-51 g (including battery)
Switching system	Push button with battery indicator

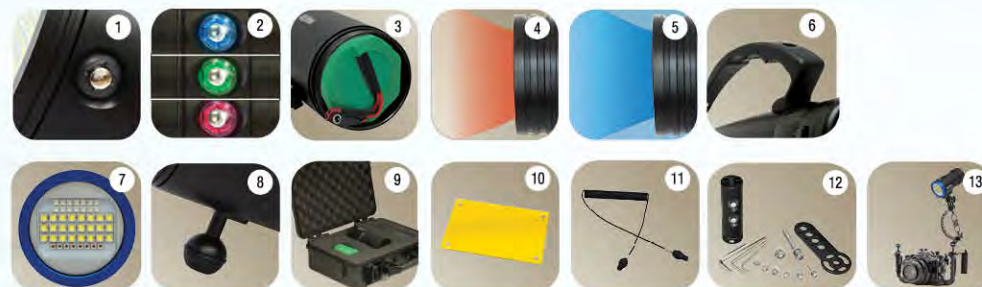

CB15000_{PBRC}

Li ion Rechargeable Battery Super Power LED Video Light with High Color Rendering Index with Blue Light with Remote Control Option

Fluorodiving Performance



15000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

1. 3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
3. BATCELL18650x7 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance
5. Built-in blue color led for fluorodiving performance. Go with yellow plate for better result.

6. COB LED to provide 15000 lumens
7. Place to insert the optical fibre.
8. Comes with ball joint for easy system setup
9. Ergonomic aluminum handle comes in a package
10. Comes with protective case for CB 15000PBRC.
11. Comes with yellow plate.
12. Optical fibre. Sold separately.
13. Controller kit set. Sold separately.
14. Set-up for the Controller.



SPECIFICATIONS

Light source	COB LED + 8 x XPE Red LED + 8 XPE Blue LED
Light output	3750 Lm (level I), 7500 Lm (level II), 15000 Lm (level III)
Light output (Red color mode)	1000 Lm
Light output (Blue color mode)	55 Lm (level I), 110 Lm (level II), 220 Lm (level III)
Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x7
Angle of light beam	160° wide beam
Color temperature	5000K
Color Rendering Index	Ra85
Burn time	1.5 hrs (level III), 3 hrs (level II) and 6 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 142.5mm
Weight in air	787 g (including battery)
Buoyancy in seawater	-304 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included

SPECIFICATIONS for CONTROLLER

Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	CR2032x2
Maximum depth	100 m tested
Size	Dia. 30 x L. 98.3mm
Weight in air	110 g (including battery)
Buoyancy in seawater	-51 g (including battery)
Switching system	Push button with battery indicator



VL10000 PBRC

Li ion Rechargeable Battery High Power LED Video Light with Blue Light with Remote Control Option

Fluorodiving Performance



1. 3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELL18650x4 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance
5. Built-in blue color led for fluorodiving performance. Go with yellow plate for better result.
6. Comes with ball joint for easy system setup
7. Removable yellow filter enhances warmer color tone
8. Sturdy glove for hands-free operation underwater
9. Comes with yellow plate.
10. Comes with random color outdoor dry bag
11. Optical fibre. Sold separately.
12. Controller kit set. Sold separately.
13. Set-up for the Controller.




SPECIFICATIONS

Light source	15 x XML LED + 6 x XPE Red LED + 8 XPE Blue LED
Light output	2500 Lm (level I), 5000 Lm (level II), 10000 Lm (level III)
Light output (Red color mode)	500 Lm
Light output (Blue color mode)	55 Lm (level I), 110 Lm (level II), 220 Lm (level III)
Casing material	Aluminum alloy Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x4
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2.5 hrs (level III), 5 hrs (level II) and 10 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.4 x L. 130.6mm
Weight in air	467 g (including battery)
Buoyancy in seawater	-184 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included

SPECIFICATIONS for CONTROLLER

Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	CR2032x2
Maximum depth	100 m tested
Size	Dia. 30 x L. 98.3mm
Weight in air	110 g (including battery)
Buoyancy in seawater	-51 g (including battery)
Switching system	Push button with battery indicator

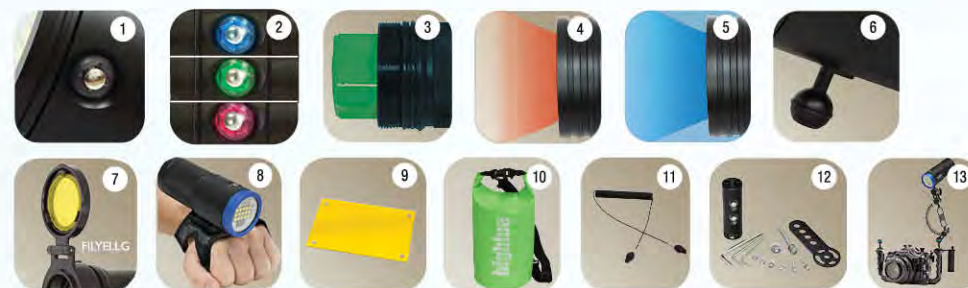

Remote Control Blue Light Series

CB10000_{PBRC}

Li ion Rechargeable Battery High Power
LED Video Light with High Color Rendering
Index with Blue Light with
Remote Control Option

Fluorodiving Performance



SPECIFICATIONS

Light source	COB LED + 6 x XPE Red LED + 8 x XPE Blue LED
Light output	2500 Lm (level I) 5000 Lm (level II), 10000 Lm (level III)
Light output (Red color mode)	500 Lm
Light output (Blue color mode)	55 Lm (level I), 110 Lm (level II), 220 Lm (level III)
Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL21700x4
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra85
Burn time	1.5 hrs (level III), 3 hrs (level II) and 6 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 140.6mm
Weight in air	679 g (including battery)
Buoyancy in seawater	-283g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included

SPECIFICATIONS for CONTROLLER

Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	CR2032x2
Maximum depth	100 m tested
Size	Dia. 30 x L. 98.3mm
Weight in air	110 g (including battery)
Buoyancy in seawater	-51 g (including battery)
Switching system	Push button with battery indicator

- 3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
- BATCELL21700x4 Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Built-in blue color led for fluorodiving performance. Go with yellow plate for better result.
- Comes with ball joint for easy system setup
- Place to insert the optical fibre.
- Snoot connector for CB 10000PBRC. Sold separately.
- Sturdy glove for hands-free operation underwater
- Comes with yellow plate.
- Comes with random color outdoor dry bag
- Optical fibre. Sold separately.
- Controller kit set. Sold separately.
- Set-up for the Controller.



CB7200 PB

Li ion Rechargeable Battery
High Power LED Video Light
with High Color Rendering Index
with Blue Light

Fluorodiving Performance



1. 3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELL21700x4 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance
5. Built-in blue color led for fluorodiving performance. Go with yellow plate for better result.
6. Snoot connector for CB 7200PB. Sold separately.
7. Sturdy glove for hands-free operation underwater
8. Comes with ball joint for easy system setup
9. Comes with random color outdoor dry bag
10. Comes with yellow plate.



SPECIFICATIONS

Light source	COB LED + 6 x XPE Red LED + 8 x XPE Blue LED
Light output	1800 Lm (level I), 3600 Lm (level II), 7200 Lm (level III)
Light output (Red color mode)	500 Lm
Light output (Blue color mode)	55 Lm (level I), 110 Lm (level II), 220 Lm (level III)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 21700x4
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 134.6mm
Weight in air	653g (including battery)
Buoyancy in seawater	-272g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included



VL4600 PB

Li ion Rechargeable Battery LED
Video Light with Blue Light

Fluorodiving Performance



1. 3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELL36250 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance
5. Built-in blue color led for fluorodiving performance. Go with yellow plate for better result.
6. Sturdy glove for hands-free operation underwater
7. Comes with ball joint for easy system setup
8. Removable yellow filter enhances warmer color tone
9. Comes with USB charger
10. Comes with random color outdoor dry bag
11. Comes with yellow plate.



SPECIFICATIONS

Light source	6 x XML LED + 4 x XPE Red LED + 4 x XPE Blue LED
Light output	1150 Lm (level I), 2300 Lm (level II) 4600 Lm (level III)
Light output (Red color mode)	300 Lm
Light output (Blue color mode)	30 Lm (level I), 60 Lm (level II) 120 Lm (level III)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level III), 3 hrs (level II) and 6 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 44 x L. 121.1 mm
Weight in air	318 g (including battery)
Buoyancy in seawater	-167 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included





AL2600 XWPB

Black Molly VB



Fluorodiving Performance



SPECIFICATIONS

Light source	4 x XML LED + 2 x XPE Red LED + 2 x XPE Blue LED
Light output	650 Lm (level I), 1300 Lm (level II), 2600 Lm (level III)
Light output (Red color mode)	150 Lm
Light output (Blue color mode)	15 Lm (level I), 30 Lm (level II), 60 Lm (level III)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 26650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.8mm
Weight in air	218g (including battery)
Buoyancy in seawater	-105g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included

- 3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Built-in red color led enhances focusing performance
- Built-in blue color led for fluorodiving performance. Go with yellow plate for better result
- Removable yellow filter enhances warmer color tone
- Comes with yellow plate.
- BATCELL26650 Li ion Rechargeable Battery
- Comes with ball joint for easy system setup
- Protective case for AL 2600XWPB. Sold separately.
- Protective case for AL 2600XWPB and Single Arm Tray. Sold separately.
- Comes with random color outdoor dry bag



AL1200 NPIR



940nm IR



SPECIFICATIONS

Light source	IR (940nm)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	10° narrow beam
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 33.2 x L. 139.8 mm
Weight in air	168 g (including battery)
Buoyancy in seawater	-76 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 levels of brightness, and SOS controlled by a reliable push button design



BATCELL 18650 Li ion Rechargeable Battery



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color

AL1200 WPIR



Comes with random color outdoor dry bag



SPECIFICATIONS

Light source	IR (940nm)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.3 mm
Weight in air	162 g (including battery)
Buoyancy in seawater	-84 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included

VL65000_P

Li ion Rechargeable Battery
Huge Power LED Video Light



THE MOST BRIGHTNESS
65000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

1. 4 levels of brightness, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design. Press two keys at the same time to come up 100%, 50%, 25%, 10% four power level setting.
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. 2x BATCELL60000 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance

5. Easy to charge up the battery pack BATCELL60000
6. 72pcs XML LED to provide 65000 lumens
7. Comes with ball joint for easy system setup
8. Make use of double clip and single arm to make the handle. Comes in a package.
9. Comes with protective case for VL65000P.



SPECIFICATIONS

Light source	72 x XML LED + 20 x XPE Red LED
Light output	6500 Lm (level I), 16250 Lm (level II) 32500 Lm (level III), 65000 Lm (level IV)
Light output (Red color mode)	2000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 2x BATCELL60000
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 120 x L 240 mm
Weight in air	3766g (including battery)
Buoyancy in seawater	-1107g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



VL36000_P

Li ion Rechargeable Battery
Ultra Power LED Video Light



36000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

1. 4 levels of brightness 1 level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
3. Easy to charge up the battery pack BATCELL 21700x8
4. Built-in red color led enhances focusing performance

5. 45pcs XML LED to provide 36000 lumens
6. Comes with ball joint for easy system setup
7. Ergonomic aluminum handle comes in a package
8. Comes with protective case for VL36000P.



SPECIFICATIONS

Light source	45 x XML LED + 10 x XPE Red LED
Light output	3600 Lm (level I), 9000 Lm (level II) 18000 Lm (level III), 36000 Lm (level IV)
Light output (Red color mode)	1200 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL21700x8
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 85 x L. 144.6 mm
Weight in air	1391g (including battery)
Buoyancy in seawater	-597g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



VL18000P

PRO MINI
TRI COLOR

Li ion Rechargeable Battery
Super Power LED Video Light
with Three Color Output



18000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

- 3 Levels of brightness for cool white mode, 3 Levels of brightness for warm white mode, 1 level of brightness of Red color mode, and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- BATCELL18650x7 Li ion Rechargeable Battery
- Built-in red color led enhances performance
- Built-in yellow color led enhances warmer color tone
- Ergonomic aluminum handle comes in a package
- FILFLUORO15000 Fluorodrive filter for VL 18000P Pro Mini Tri Color. Sold separately.
- Comes with ball joint for easy system setup
- Comes with protective case for VL 18000P Pro Mini Tri Color.




SPECIFICATIONS

Light source	32 x XML LED + 8 x XPE Red LED
Light output (Cool white mode)	4500 Lm (level I), 9000 Lm (level II) 18000 Lm (level III)
Light output (Warm white mode)	2000 Lm (level I), 4000 Lm (level II) 8000 Lm (level III)
Light output (Red color mode)	1000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x7
Angle of light beam	160° wide beam
Color temperature	6500K cool white and 5500K warm white
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 136mm
Weight in air	772 g (including battery)
Buoyancy in seawater	-313 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



VL18000_P | PRO MINI

Li ion Rechargeable Battery
Super Power LED Video Light

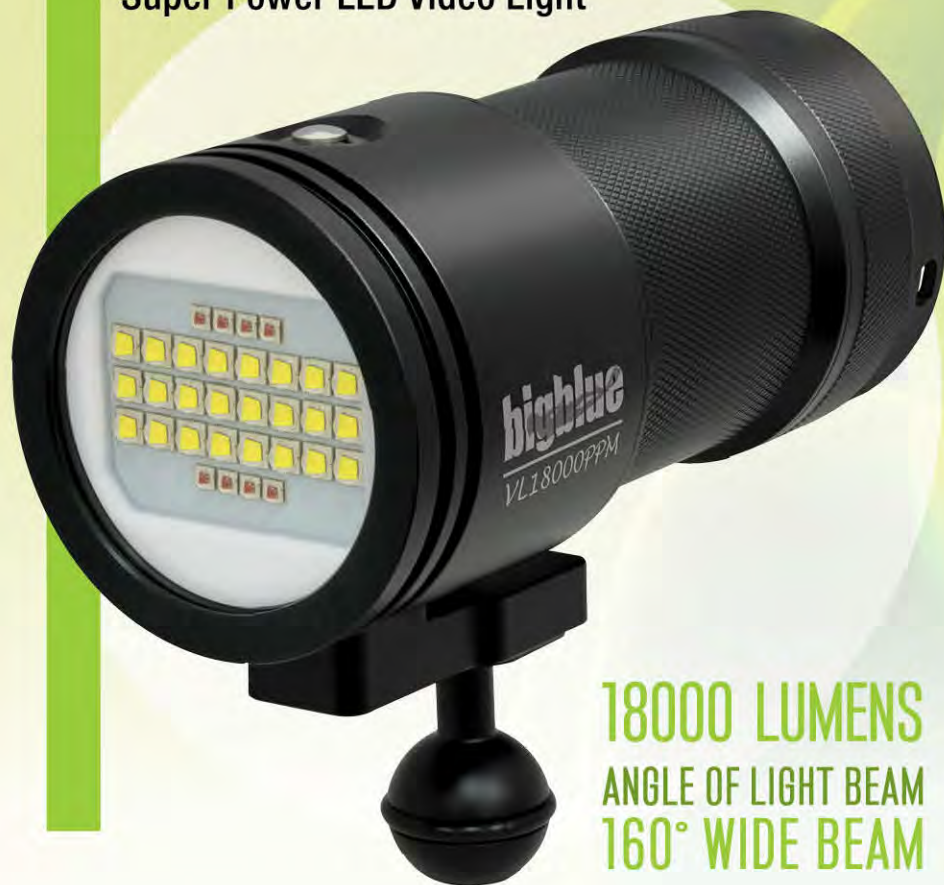

18000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM


1. 4 levels of brightness, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELL I8650x7 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance
5. 24pcs XML LED to provide 18000 lumens

6. Ergonomic aluminum handle comes in a package
7. FILFLUORO I5000 Fluorodrive filter for VL 18000P Pro Mini. Sold separately.
8. Comes with ball joint for easy system setup
9. Comes with protective case for VL 18000P Pro Mini.



SPECIFICATIONS

Light source	24 x XML LED + 8 x XPE Red LED
Light output	1800 Lm (level I), 4500 Lm (level II) 9000 Lm (level III), 18000 Lm (level IV)
Light output (Red color mode)	1000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x7
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 136mm
Weight in air	757 g (including battery)
Buoyancy in seawater	-298 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



VL11000_P

Li ion Rechargeable Battery
High Power LED Video Light




1. 4 Levels of brightness, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELL 18650x4 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance

5. Removable yellow filter enhances warmer color tone
6. Sturdy glove for hands-free operation underwater
7. Comes with ball joint for easy system setup
8. Comes with random color outdoor dry bag



SPECIFICATIONS

Light source	15 x XML LED + 6 x XPE Red LED
Light output	1100 Lm (level I), 2750 Lm (level II) 5500 Lm (level III), 11000 Lm (level IV)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 18650x4
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2.5 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 25 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.4 x L. 130.6mm
Weight in air	457g (including battery)
Buoyancy in seawater	-173g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



VL9000_P | TRI COLOR

Li ion Rechargeable Battery
High Power LED Video Light
with Three Color Output



1. 3 Levels of brightness for cool white mode, 3 Levels of brightness for warm white mode | level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
3. BATCELL18650x4 Li ion Rechargeable Battery

4. Built-in red color led enhances focusing performance
5. Built-in yellow color led enhances warmer color tone
6. Sturdy glove for hands-free operation underwater
7. Comes with ball joint for easy system setup
8. Comes with random color outdoor dry bag



SPECIFICATIONS

Light source	15 x XML LED + 6 x XPE Red LED
Light output (Cool white mode)	2250 Lm (level I), 4500 Lm (level II) 9000 Lm (level III)
Light output (Warm white mode)	1125 Lm (level I), 2250 Lm (level II) 4500 Lm (level III)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x4
Angle of light beam	120° wide beam
Color temperature	6500K cool white and 5500K warm white
Burn time	3 hrs (level III), 6 hrs (level II) and 12 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.4 x L. 130.6mm
Weight in air	457 g (including battery)
Buoyancy in seawater	-173 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



VL4600_P

Li ion Rechargeable Battery LED Video Light



Available in 3 colors



SPECIFICATIONS

Light source	6 x XML LED + 4 x XPE Red LED
Light output (Flood beam mode)	460 Lm (level I), 1150 Lm (level II) 2300 Lm (level III), 4600 Lm (level IV)
Light output (Red color mode)	300 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 44 x L. 121.1 mm
Weight in air	318 g (including battery)
Buoyancy in seawater	-167 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

1. 4 levels of brightness for Flood beam mode, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELL 32650 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance

5. Comes with ball joint for easy system setup
6. Removable yellow filter enhances warmer color tone
7. Sturdy glove for hands-free operation underwater
8. Comes with USB charger
9. Comes with random color outdoor dry bag



CB60000P

Li ion Rechargeable Battery
Huge Power LED Video Light with
High Color Rendering Index



60000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

1. 4 levels of brightness, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design. Press two keys at the same time to come up 100%, 50%, 25%, 10% four power level setting.
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. 2xBATCELL60000 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance
5. Easy to charge up the battery pack BATCELL60000
6. COB LED to provide 60000 lumens
7. Comes with ball joint for easy system setup
8. Make use of double clip and single arm to make the handle. Comes in a package.
9. Comes with protective case for CB 60000P.



SPECIFICATIONS

Light source	COB LED + 20 x XPE Red LED
Light output	6000 Lm (level I), 15000 Lm (level II) 30000 Lm (level III), 60000 Lm (level IV)
Light output (Red color mode)	2000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 2xBATCELL60000
Angle of light beam	160° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 120 x L. 240 mm
Weight in air	3766g (including battery)
Buoyancy in seawater	-1107g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



CB30000 PII

Li ion Rechargeable Battery Ultra Power
LED Video Light with High Color
Rendering Index



30000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

1. 4 levels of brightness | level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
3. BATCELL21700x8 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance

5. COB LED to provide 30000 lumens
6. Comes with ball joint for easy system setup
7. Ergonomic aluminum handle comes in a package
8. Comes with protective case for CB30000P II.



SPECIFICATIONS

Light source	COB LED + 10 x XPE Red LED
Light output	3000 Lm (level I), 7500 Lm (level II) 15000 Lm (level III), 30000 Lm (level IV)
Light output (Red color mode)	1200 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL21700x8
Angle of light beam	160° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 85 x L 144.6mm
Weight in air	1391 g (including battery)
Buoyancy in seawater	-597g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



CB15000_P

Li ion Rechargeable Battery Super Power
LED Video Light with High Color
Rendering Index



15000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

1. 4 levels of brightness 1 level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELL I8650x7 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance
5. COB LED to provide 15000 lumens
6. Comes with ball joint for easy system setup
7. Ergonomic aluminum handle comes in a package
8. Comes with protective case for CB15000P.
9. FILFLUORO I5000 Fluorodrive filter for CB15000P. Sold separately.



SPECIFICATIONS

Light source	COB LED + 8 x XPE Red LED
Light output	1500 Lm (level I), 3750 Lm (level II) 7500 Lm (level III), 15000 Lm (level IV)
Light output (Red color mode)	1000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x7
Angle of light beam	160° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 136mm
Weight in air	776g (including battery)
Buoyancy in seawater	-317g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



CB10000_P

Li ion Rechargeable Battery High Power
LED Video Light with High Color
Rendering Index



SPECIFICATIONS

Light source	COB LED + 6 x XPE Red LED
Light output	1000 Lm (level I), 2500 Lm (level II) 5000 Lm (level III), 10000 Lm (level IV)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 21700x4
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 134.6mm
Weight in air	654g (including battery)
Buoyancy in seawater	-273g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

1. 4 levels of brightness | level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
3. BATCELL21700x4 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance
5. Snoot connector for CB 10000P. Sold separately.
6. Sturdy glove for hands-free operation underwater
7. Comes with ball joint for easy system setup
8. Comes with random color outdoor dry bag



CB7200P

Li ion Rechargeable Battery High Power
LED Video Light with High
Color Rendering Index



SPECIFICATIONS

Light source	COB LED + 6 x XPE Red LED
Light output	720 Lm (level I), 1800 Lm (level II) 3600 Lm (level III), 7200 Lm (level IV)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 21700x4
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 134.6mm
Weight in air	653g (including battery)
Buoyancy in seawater	-272g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

1. 4 levels of brightness 1 level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
3. BATCELL21700x4 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance

5. Snoot connector for CB 7200P. Sold separately.
6. Sturdy glove for hands-free operation underwater
7. Comes with ball joint for easy system setup
8. Comes with random color outdoor dry bag



CB4000_P

Li ion Rechargeable Battery
LED Video Light with High
Color Rendering Index



SPECIFICATIONS

Light source	COB LED + 4 x XPE Red LED
Light output	400 Lm (level I), 1000 Lm (level II) 2000 Lm (level III), 4000 Lm (level IV)
Light output (Red color mode)	300 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 18650x3
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 50 x L. 130.3mm
Weight in air	393g (including battery)
Buoyancy in seawater	-168g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

1. 4 levels of brightness | level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
3. BATCELL 18650x3 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance

5. Sturdy glove for hands-free operation underwater
6. Comes with ball joint for easy system setup
7. Comes with random color outdoor dry bag



VTL10000_P

Li ion Rechargeable Battery High Power
LED Video / Tech Light



120° WIDE BEAM
10° NARROW BEAM

1. 4 Levels of brightness for Flood beam mode, and 1 level of brightness for Spot beam mode controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Angle of light beam
4. Removable red filter enhances focusing performance

5. Removable yellow filter enhances warmer color tone
6. Sturdy glove for hands-free operation underwater
7. Comes with ball joint for easy system setup
8. BATCELL18650x4 Li ion Rechargeable Battery
9. Comes with random color outdoor dry bag



SPECIFICATIONS

Light source	16 x XML LED
Light output (Flood beam mode)	1000 Lm (level I), 2500 Lm (level II) 5000 Lm (level III), 10000 Lm (level IV)
Light output (Spot beam mode)	1300 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x4
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	2.5 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 25 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 150.3mm
Weight in air	548g (including battery)
Buoyancy in seawater	-203g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



VTL8000_P MAX

Li ion Rechargeable Battery High Power
LED Video / Tech Light



120° WIDE BEAM
10° NARROW BEAM

1. 3 Levels of brightness for Flood beam mode, 3 levels of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design
2. Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
3. Angle of light beam
4. Built-in red color led enhances focusing performance

5. Removable yellow filter enhances warmer color tone
6. Sturdy glove for hands-free operation underwater
7. Comes with ball joint for easy system setup
8. BATCELL I8650x4 Li ion Rechargeable Battery
9. Comes with random color outdoor dry bag



SPECIFICATIONS

Light source	13 x LED + 6 x XPE Red LED
Light output (Flood beam mode)	2000 Lm (level I) 4000 Lm (level II), 8000 Lm (level III)
Light output (Spot beam mode)	650 Lm (level I) 1300 Lm (level II), 2600 Lm (level III)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x4
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	3 hrs (level III), 6 hrs (level II) and 12 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 150.3mm
Weight in air	548g (including battery)
Buoyancy in seawater	-203g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



VTL8000^P Backmount

Li ion Rechargeable Battery
High Power LED Video/
Tech Light with
Battery Canister



120° WIDE BEAM
10° NARROW BEAM

SPECIFICATIONS

Light source	11 x XML LED + 6 x XPE Red LED
Light output (Flood beam mode)	800 Lm (level I), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)
Light output (Spot beam mode)	1200 Lm
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELLCANISTER
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	6 hrs (level IV), 12 hrs (level III) 24 hrs (level II) and 60 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 63 x L. 106.5mm
Size (Canister)	Dia. 60 x L. 202mm
Weight in air (Light head)	317g
Weight in air (Canister)	975g
Buoyancy in seawater (Light head)	-101g
Buoyancy in seawater (Canister)	-384g
Switching system	Push button with battery indicator
Cable Length	1.2 meters
Front glass	Tempered optical glass



- 4 Levels of brightness for Flood beam mode, 1 levels of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Angle of light beam
- BATCELLCANISTER Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Removable yellow filter enhances warmer color tone
- Easy to charge up the battery BATCELLCANISTER
- Comes with ball joint for easy system setup
- Slim fit Goodman handle with connector. Comes in a package
- Comes with protective case for VTL 8000P Backmount.

VTL8000^P Sidemount

Li ion Rechargeable Battery
High Power LED Video/
Tech Light with
Battery Canister



120° WIDE BEAM
10° NARROW BEAM

SPECIFICATIONS

Light source	11 x XML LED + 6 x XPE Red LED
Light output (Flood beam mode)	800 Lm (level I), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)
Light output (Spot beam mode)	1200 Lm
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELLCANISTER
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	6 hrs (level IV), 12 hrs (level III) 24 hrs (level II) and 60 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 63 x L. 106.5mm
Size (Canister)	Dia. 60 x L. 212mm
Weight in air (Light head)	317g
Weight in air (Canister)	1033g
Buoyancy in seawater (Light head)	-101g
Buoyancy in seawater (Canister)	-407g
Switching system	Push button with battery indicator
Cable Length	1.35 meters
Front glass	Tempered optical glass



- 4 Levels of brightness for Flood beam mode, 1 levels of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Angle of light beam
- BATCELLCANISTER Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Removable yellow filter enhances warmer color tone
- Easy to charge up the battery BATCELLCANISTER
- Comes with ball joint for easy system setup
- Slim fit Goodman handle with connector. Comes in a package
- Comes with protective case for VTL 8000P Sidemount.

VTL8000P

Li ion Rechargeable Battery High Power
LED Video / Tech Light



120° WIDE BEAM
10° NARROW BEAM



SPECIFICATIONS

Light source	11 x XML LED + 6 x XPE Red LED
Light output (Flood beam mode)	800 Lm (level I), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)
Light output (Spot beam mode)	1200 Lm
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x4
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	3 hrs (level IV), 6 hrs (level III) 12 hrs (level II) and 30 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 150.3mm
Weight in air	548g (including battery)
Buoyancy in seawater	-203g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

1. 4 Levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Angle of light beam
4. Built-in red color led enhances focusing performance

5. Removable yellow filter enhances warmer color tone
6. Sturdy glove for hands-free operation underwater
7. Comes with ball joint for easy system setup
8. BATCELL I8650x4 Li ion Rechargeable Battery
9. Comes with random color outdoor dry bag





VTL4200P

Li ion Rechargeable Battery
LED Video / Tech Light



120° WIDE BEAM
10° NARROW BEAM

SPECIFICATIONS

Light source	7 x XML LED + 2 x XPE Red LED
Light output (Flood beam mode)	420 Lm (level I), 1050 Lm (level II) 2100 Lm (level III), 4200 Lm (level IV)
Light output (Spot beam mode)	1300 Lm
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.5 x L. 140.6 mm
Weight in air	432 g (including battery)
Buoyancy in seawater	-205 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



- 4 Levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Angle of light beam
- Sturdy glove for hands-free operation underwater
- Built-in red color led enhances focusing performance.
- Removable yellow filter enhances warmer color tone
- Comes with ball joint for easy system setup
- BATCELL 32650 Li ion Rechargeable Battery
- Comes with USB charger
- Comes with random color outdoor dry bag



VTL2600P

Li ion Rechargeable Battery
LED Video / Tech Light



100° WIDE BEAM
10° NARROW BEAM

Available in 3 colors

SPECIFICATIONS

Light source	7 x LED + 2 x XPE Red LED
Light output (Flood beam mode)	260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)
Light output (Spot beam mode)	1000 Lm
Light output (Red color mode)	100 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	100° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 44 x L. 128.7 mm
Weight in air	339 g (including battery)
Buoyancy in seawater	-177 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



- 4 Levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Angle of light beam
- Sturdy glove for hands-free operation underwater
- Built-in red color led enhances focusing performance.
- Removable yellow filter enhances warmer color tone
- Comes with ball joint for easy system setup
- BATCELL 32650 Li ion Rechargeable Battery
- Comes with random color outdoor dry bag

8000
lumens

TL8000_P

Li ion Rechargeable Battery Super
Power LED Tech Light



SPECIFICATIONS

Light source	8 x LED
Light output	800 Lm (level I), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x7
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 78 x L 143.8 mm
Weight in air	830 g (including battery)
Buoyancy in sea-water	-313 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

1. 4 levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
3. BATCELL18650x7 Li ion Rechargeable Battery
4. Ergonomic aluminum handle comes in a package
5. Slim fit Goodman handle with connector. Comes in a package
6. Comes with random color outdoor dry bag



TL5200^P Backmount

Li ion Rechargeable Battery
High Power LED Tech Light
with Battery Canister



ERM
EASY RELEASE
MOUNT

5200
lumens

SPECIFICATIONS

Light source	4 x XML LED
Light output	520 Lm (level I), 1300 Lm (level II) 2600 Lm (level III), 5200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELLCANISTER
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	7 hrs (level IV), 14 hrs (level III) 28 hrs (level II) and 70 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 72 x L. 88.3mm
Size (Canister)	Dia. 60 x L. 202mm
Weight in air (Light head)	380g
Weight in air (Canister)	975g
Buoyancy in seawater (Light head)	-134g
Buoyancy in seawater (Canister)	-384g
Switching system	Push button with battery indicator
Cable Length	1.2 meters
Front glass	Tempered optical glass



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELLCANISTER Li ion Rechargeable Battery
4. Slim fit Goodman handle with connector. Comes in a package
5. Easy to charge up the battery BATCELLCANISTER
6. Comes with protective case for TL 5200P Backmount.

TL5200^P Sidemount

Li ion Rechargeable Battery
High Power LED Tech Light
with Battery Canister



ERM
EASY RELEASE
MOUNT

5200
lumens

SPECIFICATIONS

Light source	4 x XML LED
Light output	520 Lm (level I), 1300 Lm (level II) 2600 Lm (level III), 5200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELLCANISTER
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	7 hrs (level IV), 14 hrs (level III) 28 hrs (level II) and 70 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 72 x L. 88.3mm
Size (Canister)	Dia. 60 x L. 212mm
Weight in air (Light head)	380g
Weight in air (Canister)	1033g
Buoyancy in seawater (Light head)	-134g
Buoyancy in seawater (Canister)	-407g
Switching system	Push button with battery indicator
Cable Length	1.35 meters
Front glass	Tempered optical glass



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELLCANISTER Li ion Rechargeable Battery
4. Slim fit Goodman handle with connector. Comes in a package
5. Easy to charge up the battery BATCELLCANISTER
6. Comes with protective case for TL 5200P Sidemount.

TL5200_P

Li ion Rechargeable Battery High Power LED Tech Light



SPECIFICATIONS

Light source	4 x XML LED
Light output	520 Lm (level I), 1300 Lm (level II) 2600 Lm (level III), 5200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x4
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 72 x L. 150.3mm
Weight in air	596 g (including battery)
Buoyancy in sea-water	-222 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

1. 4 levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELL18650x4 Li ion Rechargeable Battery
4. Sturdy Goodman Glove for handy Tech-dive operation
5. Ergonomic aluminum handle comes in a package
6. Goodman handle with connector or Slim fit Goodman handle with connector. Sold separately.
7. Comes with random color outdoor dry bag



TL3800^P Supreme

Li ion Rechargeable Battery
LED Tech Light



SPECIFICATIONS

Light source	3 x XML LED
Light output	380 Lm (level I), 950 Lm (level II) 1900 Lm (level III), 3800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x4 SUPREME
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	3 hrs (level IV), 6 hrs (level III) 12 hrs (level II) and 30 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 63 x L. 125 mm
Weight in air	517 g (including battery)
Buoyancy in seawater	-221 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Ergonomic aluminum handle comes in a package
4. BATCELL I8650x4 SUPREME Li ion Rechargeable Battery
5. Sturdy Goodman Glove for handy Tech-diver operation
6. Goodman handle with connector or Slim fit Goodman handle with connector. Sold separately.
7. Comes with random color outdoor dry bag

TL3800^P

Li ion Rechargeable Battery
LED Tech Light



SPECIFICATIONS

Light source	3 x XML LED
Light output	380 Lm (level I), 950 Lm (level II) 1900 Lm (level III), 3800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 63 x L. 135.6 mm
Weight in air	447 g (including battery)
Buoyancy in seawater	-217 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Ergonomic aluminum handle comes in a package
4. BATCELL 32650 Li ion Rechargeable Battery
5. Sturdy Goodman Glove for handy Tech-diver operation
6. Goodman handle with connector or Slim fit Goodman handle with connector. Sold separately.
7. Comes with USB charger
8. Comes with random color outdoor dry bag

TL2600_P

Li ion Rechargeable Battery
LED Tech Light



Available in 3 colors

SPECIFICATIONS

Light source	3 x LED
Light output	260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 50 x L. 130 mm
Weight in air	359 g (including battery)
Buoyancy in seawater	-188 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Sturdy Goodman Glove for handy Tech-dive operation
4. BATCELL 32650 Li ion Rechargeable Battery
5. Ergonomic aluminum handle comes in a package
6. Goodman handle with connector or Slim fit Goodman handle with connector. Sold separately.
7. Comes with random color outdoor dry bag



LIGHT HEAD





AL2600 Black Molly V XWP II



Available in 2 colors



SPECIFICATIONS

Light source	4 x XML LED + 2 x XPE Red LED
Light output	260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.8 mm
Weight in air	218 g (including battery)
Buoyancy in seawater	-105 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

1. 4 Levels of brightness, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Built-in red color led enhances focusing performance
4. Removable yellow filter enhances warmer color tone
5. BATCELL26650 Li ion Rechargeable Battery
6. Comes with ball joint for easy system setup
7. Protective case for AL 2600XWP II and Single Arm Tray. Sold separately.
8. Protective case for AL 2600XWP II. Sold separately.
9. Comes with random color outdoor dry bag



AL1800 Black Molly IV XWP II Tri Color



Available in 2 colors

SPECIFICATIONS

Light source	4 x XML LED + 2 x XPE Red LED
Light output (Cool white mode)	450 Lm (level I), 900 Lm (level II) 1800 Lm (level III)
Light output (Warm white mode)	450 Lm (level I), 900 Lm (level II) 1800 Lm (level III)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	120° wide beam
Color temperature	6500K cool white and 5500K warm white
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.8 mm
Weight in air	218 g (including battery)
Buoyancy in seawater	-105 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



1. 3 Levels of brightness for cool white mode, 3 Levels of brightness for warm white mode, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Built-in red color led enhances focusing performance
4. Built-in yellow color led enhances warmer color tone
5. BATCELL26650 Li ion Rechargeable Battery
6. Comes with ball joint for easy system setup
7. Protective case for AL 1800XWP Tri Color II and Single Arm Tray. Sold separately.
8. Protective case for AL 1800XWP Tri Color II. Sold separately.
9. Comes with random color outdoor dry bag



AL1800_{NP II}

Li ion Rechargeable Battery
Narrow Beam LED Light



Available in 2 colors

SPECIFICATIONS

Light source	XML x LED
Light output	180 Lm (level I), 450 Lm (level II), 900 Lm (level III), 1800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III), 6 hrs (level II) and 15 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 35.5 x L. 139.8 mm
Weight in air	235 g (including battery)
Buoyancy in seawater	-113 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELL26650 Li ion Rechargeable Battery
4. Comes with USB charger
5. Comes with random color outdoor dry bag



AL1800_{WP}


Li ion Rechargeable Battery
Wide Beam LED Light



Available in 2 colors

SPECIFICATIONS

Light source	XML x LED
Light output	180 Lm (level I), 450 Lm (level II), 900 Lm (level III), 1800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III), 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 129 mm
Weight in air	228 g (including battery)
Buoyancy in seawater	-120 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELL26650 Li ion Rechargeable Battery
4. Comes with ball joint for easy system setup
5. Removable red and yellow filters enhances focusing performances and warm color tone
6. Snoot Connector for AL1800WP. Sold separately.
7. Comes with USB charger
8. Comes with random color outdoor dry bag

AL1300 Strobe

Li ion Rechargeable Battery
LED Strobe Light



SPECIFICATIONS

Light source	XML LED
Light output	1300 Lm
Blinking frequency	60 pulses per minute
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	270°
Burn time	12 hrs
Maximum depth	150 m tested
Size	Dia. 35.5 x L. 152.6 mm
Weight in air	170 g (including battery)
Buoyancy in seawater	-81 g (including battery)
Switching system	Push button with battery indicator
Lanyard	Included



1. On / Off controlled by a reliable push button design
2. Battery level indicator built-in: Blue color /Green color /Red color /Flash Red color
3. BATCELL 18650 Li ion Rechargeable Battery
4. Comes with random color outdoor dry bag
5. Blinking frequency : 60 pulses per minute

AL450 Strobe

LED Aluminium Strobe Light



SPECIFICATIONS

Light source	Cree LED
Light output	450 Lm
Blinking frequency	60 pulses per minute
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	3 x AAA alkaline or Ni-MH batteries
Angle of light beam	270°
Burn time	36 hrs
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 136.7 mm
Weight in air	131 g (including battery)
Buoyancy in seawater	-47 g (including battery)
Switching system	Push button
Lanyard	Included



1. Push on / off button on the bottom
2. 3xAAA stand-alone battery holder
3. Blinking frequency : 60 pulses per minute

AL1300

Camouflage NP


Li ion Rechargeable Battery
Narrow Beam LED Light



Available in 4 colors

SPECIFICATIONS

Light source	XML LED
Light output	130 Lm (level I), 325 Lm (level II) 650 Lm (level III), 1300 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 33.2 x L. 139.8 mm
Weight in air	168 g (including battery)
Buoyancy in seawater	-76 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

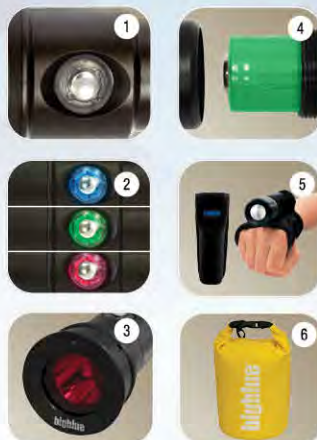

1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. FILREDNP Red filter for AL1300NP. Sold separately.
4. BATCELL 18650 Li ion Rechargeable Battery
5. Our light can fit in glove or pouch. Sold separately.
6. Comes with random color outdoor dry bag



AL450

Camouflage NM Tail II Spotter

Narrow Beam Aluminum LED Light
with Tail Switch Button



Available in 2 colors

SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.33 x L.121.7mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Angle of light beam: 8°
- Up to 4hrs of burn time
- Lanyard included
- 150g (including batteries) weight in air
- -70g (including batteries) buoyancy in seawater
- Switching System : Push Button



1. Push on / off button on the bottom
2. 3xAAA stand-alone battery holder
3. AL 450NM Tail II LED with Glove
4. AL 450NM Tail II LED with Pouch
5. AL 450NM Tail II LED with Pouch and Glove



AL450

Camouflage WM Tail

450
lumens

LED Aluminum Diving Light with Tail Switch Button



Available in 2 colors

SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.36 x L.122.6mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Angle of light beam: 40°
- Up to 4hrs of burn time
- Lanyard included
- 160g (including batteries) weight in air
- -74g (including batteries) buoyancy in seawater
- Switching System : Push Button



1. Push on / off button on the bottom
2. 3xAAA stand-alone battery holder
3. AL 450WM Tail LED with Glove
4. AL 450WM Tail LED with Pouch
5. AL 450WM Tail LED with Pouch and Glove

AL250

Camouflage

250
lumens


Multi-Function Aluminum LED Light



Available in 2 colors

SPECIFICATIONS

Light source	1 x XPG LED
Light output	250 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	2xAA alkaline or Ni-MH batteries
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	Up to 2 hrs
Maximum depth	100 m tested
Size	Dia. 28 x L. 147.8 mm
Weight in air	135 g (including battery)
Buoyancy in seawater	-85 g (including battery)
Front glass	Tempered optical glass
Lanyard	Included

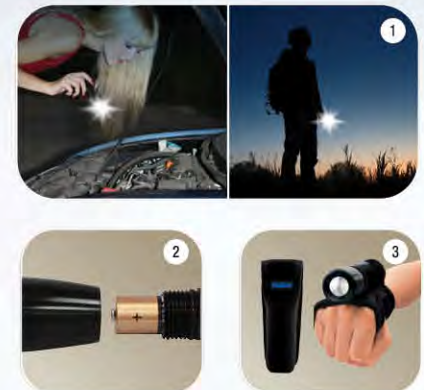

1. Light is suitable for multi-function
2. Operate with 2xAA batteries
3. Our light can fit in glove or pouch. Sold separately.

AL1300 NP Tail



Li ion Rechargeable Battery
Narrow Beam LED Light with
Tail Switch Button



SPECIFICATIONS

Light source	XML LED
Light output	130 Lm (level I), 325 Lm (level II) 650 Lm (level III), 1300 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 33.2 x L. 152.2 mm
Weight in air	189 g (including battery)
Buoyancy in seawater	-87 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. FILREDNP Red filter for AL1300NP Tail. Sold separately.
4. BATCELL 18650 Li ion Rechargeable Battery
5. Our light can fit in glove or pouch. Sold separately.
6. Protective case for AL 1300NP Tail. Sold separately.
7. Comes with random color outdoor dry bag

AL1300 WP Tail



Li ion Rechargeable Battery
Wide Beam LED Light with
Tail Switch Button



SPECIFICATIONS

Light source	XML LED
Light output	130 Lm (level I), 325 Lm (level II) 650 Lm (level III), 1300 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 137.7 mm
Weight in air	177 g (including battery)
Buoyancy in seawater	-88 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included

1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Comes with the clip for easy system setup
4. Snoot Connector for AL1300WP Tail. Sold separately.
5. BATCELL 18650 Li ion Rechargeable Battery
6. Removable red and yellow filters enhances focusing performances and warm color tone
7. Our light can fit in glove or pouch. Sold separately.
8. Protective case for AL 1300WP Tail. Sold separately.
9. Comes with random color outdoor dry bag

AL1300_{NP}

Li ion Rechargeable Battery
Narrow Beam LED Light



SPECIFICATIONS

Light source	XML LED
Light output	130 Lm (level I), 325 Lm (level II) 650 Lm (level III), 1300 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 33.2 x L. 139.8 mm
Weight in air	168 g (including battery)
Buoyancy in seawater	-76 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. FILREDNP Red filter for AL1300NP. Sold separately.
4. BATCELL 18650 Li ion Rechargeable Battery
5. Our light can fit in glove or pouch. Sold separately.
6. Protective case for AL 1300NP. Sold separately.
7. Comes with random color outdoor dry bag

AL1300_{WP}

Li ion Rechargeable Battery
Wide Beam LED Light



SPECIFICATIONS

Light source	XML LED
Light output	130 Lm (level I), 325 Lm (level II) 650 Lm (level III), 1300 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.3 mm
Weight in air	162 g (including battery)
Buoyancy in seawater	-84 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Comes with the clip for easy system setup
4. Snoot Connector for AL1300WP. Sold separately.
5. BATCELL 18650 Li ion Rechargeable Battery
6. Removable red and yellow filters enhances focusing performances and warm color tone
7. Our light can fit in glove or pouch. Sold separately.
8. Protective case for AL 1300WP. Sold separately.
9. Comes with random color outdoor dry bag

AL1300_{XWP}

Li ion Rechargeable Battery Extra Wide Beam LED Light



SPECIFICATIONS

Light source	XML LED
Light output	130 Lm (level I), 325 Lm (level II) 650 Lm (level III), 1300 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 122.1 mm
Weight in air	160 g (including battery)
Buoyancy in seawater	-84 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Comes with the clip for easy system setup
4. Snoot Connector for AL1300XWP. Sold separately.
5. BATCELL 18650 Li ion Rechargeable Battery
6. Removable red and yellow filters enhances focusing performances and warm color tone
7. Our light can fit in glove or pouch. Sold separately.
8. Protective case for AL 1300XWP. Sold separately.
9. Comes with random color outdoor dry bag

AL1200_{RAFO}

Li ion Rechargeable Battery Wide Beam LED Light with Auto-Flash Off Function



SPECIFICATIONS

Light source	XML LED + 2 x XPE Red LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV) 150 Lm
Light output (Red collar mode)	
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	55° wide beam
Color temperature	6500K
AFO interval	0.2sec. +/- 0.1 sec.
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 42.4 x L. 128.3 mm
Weight in air	242 g (including battery)
Buoyancy in seawater	-129 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Comes with ball joint for easy system setup
4. Automatic Flash Off Function AFO interval: 0.2 sec. +/- 0.1 sec.
5. Built-in red color led enhances focusing performance
6. BATCELL 18650 Li ion Rechargeable Battery
7. Comes with random color outdoor dry bag

AL450 WM Tail

LED Aluminum Diving Light
with Tail Switch Button

450
lumens



SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.36 x L.122.6mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Angle of light beam: 40°
- Up to 4hrs of burn time
- Lanyard included
- 160g (including batteries) weight in air
- -74g (including batteries) buoyancy in seawater
- Switching System : Push Button



1. Push on / off button on the bottom
2. 3xAAA stand-alone battery holder
3. AL 450WM Tail LED with Glove
4. AL 450WM Tail LED with Pouch
5. AL 450WM Tail LED with Pouch and Glove

NEW

450
lumens

AL450 NM Tail II Spotter

Narrow Beam Aluminum LED Light
with Tail Switch Button



SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.33 x L.121.7mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Angle of light beam: 8°
- Up to 4hrs of burn time
- Lanyard included
- 150g (including batteries) weight in air
- -70g (including batteries) buoyancy in seawater
- Switching System : Push Button



1. Push on / off button on the bottom
2. 3xAAA stand-alone battery holder
3. AL 450NM Tail II LED with Glove
4. AL 450NM Tail II LED with Pouch
5. AL 450NM Tail II LED with Pouch and Glove

AL250

Multi-Function Aluminum LED Light



250
lumens

SPECIFICATIONS

Light source	1 x XPG LED
Light output	250 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	2xAA alkaline or Ni-MH batteries
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	Up to 2 hrs
Maximum depth	100 m tested
Size	Dia. 28 x L. 147.8 mm
Weight in air	135 g (including battery)
Buoyancy in seawater	-85 g (including battery)
Front glass	Tempered optical glass
Lanyard	Included



1. Light is suitable for multi-function
2. Operate with 2xAA batteries
3. Our light can fit in glove or pouch. Sold separately.
4. Available in 5 colors

RGB White II

Li ion Rechargeable Battery 4 Colors LED Light



SPECIFICATIONS

Light source	LED
Light output	500 Lm (white), 120 Lm (red) 40 Lm (blue), 300 Lm (green)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	2 hrs
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.3 mm
Weight in air	162 g (including battery)
Buoyancy in seawater	-84 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included



1. 4 colors of light and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Comes with the clip for easy system setup
4. BATCELL 18650 Li ion Rechargeable Battery
5. Built-in red color Led
6. Built-in green color Led
7. Built-in blue color Led
8. Snoot Connector for RGB White II. Sold separately.
9. Our light can fit in glove or pouch. Sold separately.
10. Comes with random color outdoor dry bag




CF1800_P

Li ion Rechargeable Battery
Changeable Focus
LED Light



SPECIFICATIONS

Light source	XML LED
Light output	180 Lm (level I), 450 Lm (level II) 900 Lm (level III), 1800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	7° narrow beam to 37° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 169.3mm
Weight in air	301 g (including battery)
Buoyancy in seawater	-146 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

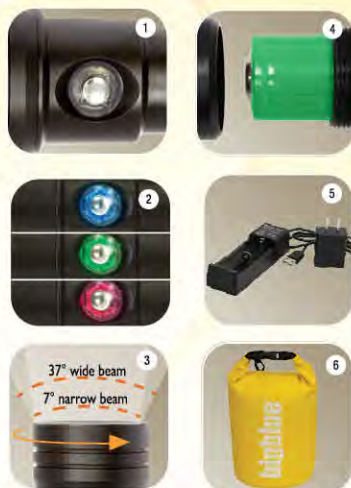

1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Twist the front to change the focus (Turning force increases with depth)
4. BATCELL 26650 Li ion Rechargeable Battery
5. Comes with USB charger
6. Comes with random color outdoor dry bag



CF1200_{P II}

Li ion Rechargeable Battery
Changeable Focus
LED Light



SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	7° narrow beam to 37° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 169.3mm
Weight in air	245 g (including battery)
Buoyancy in seawater	-121 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Twist the front to change the focus (Turning force increases with depth)
4. BATCELL 18650 Li ion Rechargeable Battery
5. Comes with random color outdoor dry bag

CF450_M

Changeable Focus LED Light



Slim
Size

5X
Focusable

450
lumens

Available in 2 colors

SPECIFICATIONS

Light source	Cree LED
Light output	450 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	3xAAA alkaline or Ni-MH batteries
Angle of light beam	7° to 37°adjustable
Color temperature	6500K
Burn time	Up to 4hrs
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 121.5mm
Weight in air	193 g (including batteries)
Buoyancy in seawater	-81 g (including batteries)
Switching system	Magnetic Swivel
Front glass	Tempered optical glass & Convex Lens
Lanyard	Included



1. Twist the front to change the focus (Turning force increases with depth)
2. Magnetic Swivel Switch allows for one hand operation
3. 3xAAA stand-alone battery holder
4. CF 450 M LED with Glove
5. CF 450 M LED with Pouch
6. CF 450 M LED with Pouch and Glove

EASY CLIP Rainbow Color Light



SPECIFICATIONS

- Available fifteen color output –Red, Green, Orange, Blue, Purple, Yellow, Light Blue, Flash red, Flash green, Flash orange, Flash blue, Flash purple, Flash yellow, Flash light blue automatically run all fourteen modes.
- 12-24 hrs of burn time
- 2 x CR2032 batteries
- Dia. 32 x L. 38mm
- 100 meter tested
- Lanyard included
- 23g (including batteries) weight in air
- -3g (including batteries) buoyancy in seawater

EASY CLIP Light with Flash



SPECIFICATIONS

- Available six color output – Blue, Red, Green, Flash Blue, Flash Red, Flash Green
- Up to 36 hrs of burn time
- 2 x CR2032 batteries
- Dia. 32 x L. 38mm
- 100 meter tested
- Lanyard included
- 23g (including batteries) weight in air
- -3g (including batteries) buoyancy in seawater

HL1000_N

1000
lumens

Li ion Rechargeable Battery Narrow Beam LED Head Light



FILREDHLN Red filter for HL 1000N.
Sold separately.



SPECIFICATIONS

Light source	Cree LED
Light output	100 Lm (level I), 250 Lm (level II) 500 Lm (level III), 1000 Lm (level IV)
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	Li ion Rechargeable battery pack BATCELL18650
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 41 mm
Weight in air	205 g (including battery)
Buoyancy in seawater	-74 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



4 levels of
brightness
and SOS controlled
by a reliable push
button design



BATCELL18650
Li ion
Rechargeable
Battery



Battery level
indicator built-in:
Blue color /
Green color / Red
color / Flash Red
color

HL450_N

450
lumens

Narrow Beam LED Head Light



FILREDHLN Red filter for HL 450N.
Sold separately.



SPECIFICATIONS

Light source	Cree LED
Light output	45 Lm (level I), 113 Lm (level II) 225 Lm (level III), 450 Lm (level IV)
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	3 x AAA alkaline batteries
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 41 mm
Weight in air	187 g (including batteries)
Buoyancy in seawater	-56 g (including batteries)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



4 levels of
brightness
and SOS controlled
by a reliable push
button design



3 x AAA
alkaline
batteries



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red
color

HL1000_{xw}

1000
lumens

Li ion Rechargeable Battery Extra Wide Beam LED Head Light



Built-in red color led enhances
focusing performance

SPECIFICATIONS

Light source	2 x Cree LED + 2 x XPE Red LED
Light output	100 Lm (level I), 250 Lm (level II) 500 Lm (level III), 1000 Lm (level IV)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	Li ion Rechargeable battery pack BATCELL18650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 38.8mm
Weight in air	207 g (including battery)
Buoyancy in seawater	-76 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



HL450_{xw}

450
lumens

Extra Wide Beam LED Head Light



Built-in red color led enhances
focusing performance

SPECIFICATIONS

Light source	2 x Cree LED + 2 x XPE Red LED
Light output	45 Lm (level I), 113 Lm (level II) 225 Lm (level III), 450 Lm (level IV)
Light output (Red color mode)	100 Lm
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	3 x AAA alkaline batteries
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 38.8 mm
Weight in air	189 g (including batteries)
Buoyancy in seawater	-58 g (including batteries)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



Green Spot light & Red Spot light



SPECIFICATIONS

GREEN SPOT LIGHT	
Light source	: Green Laser
Light output	: Below 1 mW
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: 2 x AAA alkaline or Ni-MH batteries
Wavelength	: 520nm
Burn time	: Up to 12 hrs
Maximum depth	: 100 m tested
Size	: Dia. 19 x L. 168.6 mm
Weight in air	: 89 g (including batteries)
Buoyancy in seawater	: -54 g (including batteries)
Switching system	: Twisting Bezel
Front glass	: Tempered optical glass
Lanyard	: Included

RED SPOT LIGHT

Light source	: Red Laser
Light output	: Below 1 mW
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: 2 x AAA alkaline or Ni-MH batteries
Wavelength	: 650nm
Burn time	: Up to 12 hrs
Maximum depth	: 100 m tested
Size	: Dia. 19 x L. 154.1 mm
Weight in air	: 82 g (including batteries)
Buoyancy in seawater	: -51 g (including batteries)
Switching system	: Twisting Bezel
Front glass	: Tempered optical glass
Lanyard	: Included



Operate with
2 x AAA batteries



CLIPMNTSPOT
Mounting clip for Green
Spot Light and Red Spot
Light. Sold separately.

Protective Case Series



Model :	PC101 A	PC102 A	PC103 A	PC104 A	PC105 A	PC106 A
Outer Dimension :	225 x 180 x 100 mm	350 x 270 x 120 mm	340 x 310 x 120 mm	360 x 285 x 190 mm	420 x 360 x 130 mm	420 x 360 x 190 mm
Inner Dimension :	200 x 135 x 85 mm	325 x 210 x 110 mm	310 x 250 x 107 mm	330 x 270 x 175 mm	380 x 310 x 120 mm	380 x 310 x 180 mm

FLUORODIVE Kit sets

Science has discovered corals contain Fluorescent Proteins invisible to the naked eye that jump into view using innovative high-intensity fluorolights and filters.

Bigblue Fluorodive Kits provide everything you need to experience this incredibly beautiful effect. You get specially designed filters to precisely match the coral fluorescence wavelength, and yellow blue-barrier filters to increase the intensity of the colors emitted by the corals. Our innovative design is the only one that allows you to easily switch between blue and white light to accommodate changes in dive conditions.

These kits are suitable for night divers, resorts, science institutions, ecological monitoring groups and specialty photographers.

Truly there is nothing that can match the beauty of witnessing coral fluorescence on your next night dive!



Photos of the fluorescence stimulated by the specific wavelength and captured through a barrier filter

FDK35	CF450M / CF1200P II / AL1300WP / AL1300XWP / AL1300WP Tail / AL1800WP / CF1800P / BLACK MOLLY IV / BLACK MOLLY V / Fluorodive Kit
FDK38	CF450 / CF1200P / AL1200WP / AL1200XWP / AL1200WP Tail / BLACK MOLLY II / BLACK MOLLY III Fluorodive Kit
FDK44	VL4600P / VTL2600P Fluorodive Kit
FDK55	VTL4200P / VL11000P / VL9000P Tri Color Fluorodive Kit
FDK63	CF7200P / CB10000P / VTL8000P VTL8000P Max / VTL10000P / Fluorodive Kit




Camera Filters

Camera filters are available for you to capture the macro or wide angle photos or videos of the memorable aquatic creatures.

FILFLUOR015000

Fluorodive filter for VL 18000P Pro Mini / VL 18000P Pro Mini Tri Color / CB15000P

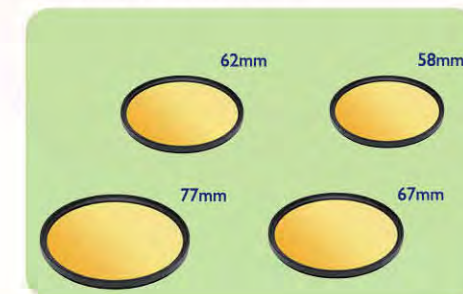

COMBO PACK SERIES

AL 450 NM Tail II Spotter
Narrow Beam Aluminum LED Light with
Tail Switch Button

AL 1300NP

Li Ion Rechargeable Battery Narrow
Beam LED Light

Easy Clip Rainbow Color light



AL 450 NM Tail II Spotter
Narrow Beam Aluminum LED Light with
Tail Switch Button

AL 1300WP

Li Ion Rechargeable Battery Wide
Beam LED Light

Easy Clip Rainbow Color light



AL 250

Multi-Function Aluminum LED Light

AL 1300NP

Li Ion Rechargeable Battery
Narrow Beam LED Light

Easy Clip Rainbow Color light



AL 450 WM Tail
LED Aluminum Diving Light with
Tail Switch Button

AL 1300NP

Li Ion Rechargeable Battery Narrow
Beam LED Light

Easy Clip Rainbow Color light



AL 450 WM Tail
LED Aluminum Diving Light with
Tail Switch Button

AL 1300WP

Li Ion Rechargeable Battery Wide
Beam LED Light

Easy Clip Rainbow Color light



AL 250

Multi-Function Aluminum LED Light

AL 1300WP

Li Ion Rechargeable Battery
Wide Beam LED Light

Easy Clip Rainbow Color light



CAMERA TRAY 34



Camera Tray 34 with 34cm long tray.
Two 1" Ball joint arms with no-slip grip.
Compatible with Smart Phone Housings
e.g. Iphone, Samsung, Huawei

CAMERA TRAY 27



Camera Tray 27 with 27cm long tray.
Two 1" Ball joint arms with no-slip grip.
Compatible with Olympus TG4/TG5 Housings.

BBGPTray

Go Pro Tray



Go Pro Hot Shoe Adapter



Go Pro Light Adaptor



Go Pro Kit sets

GP4200 Kit

- 1 pc. of Double Clip (CLP02)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Light not included



GP450 Kit

- 2 pcs. of Mounting Clip (CLIPMINTCF)
- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Lights not included



GP1300 Kit

- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Lights not included



Protective Case for Go Pro Tray Kit Set

- 1 pc. of ALI300WVP
- 1 pc. of ALI300XWVP
- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)



EXTENDGPTRAY

Extendable Go Pro Tray



Extend from 176mm to 287mm

SINGLEARMTRAY

Single Arm Go Pro Tray



FLEXIGPTRAY

FLEXISINGLEARMTRAY

FLEXIEXTENDGPTRAY

7" Flexi Arm
Go Pro Tray

7" Flexi Arm Single Arm Tray

7" Flexi Arm Extendable
Go Pro Tray

TRIPOD PLATE

Size: W.112 x L.272mm
Comes with four 1" Ball jointEasy assemble with double clip and arms.
Double clip and arms sold separately.

Batteries & Chargers



BATCELL18650

Battery for AL1300NP / AL1300WP /
AL1300XWP / AL1300NP Tail /
AL1300VWP Tail / CF1200P II / AL1200RAFO /
HL1000XW / HL1000N / RGBWhite II /
AL1200NP IR / AL1200VWP IR /
AL1300 Strobe



BATCELL26650

Battery for
Black Molly IV / Black Molly V /
Black Molly VB / AL1800NP II /
AL1800WP / CF1800P



BATCELL32650

Battery for VL4600P / VTL4200P /
TL3800P / VTL2600P / TL2600P /
VL4600PB



CR2032

Battery for Easy
Clip Light /
Controller



BATCELL18650x3

Battery for CB 4000P



BATCELL18650x4

Battery for VL11000P /
VTL8000P / VTL8000P Max /
TL5200P / VL9000P Tri Color /
VTL10000P / VL10000PBR



BATCELL21700x4

Battery for
CB7200P / CB10000P /
CB7200PB / CB10000PBR



BATCELL18650x7

Battery for
VL18000P Pro Mini /
VL18000P Pro Mini Tri Color /
CB15000P / TL8000P /
VL18000PBR / CB15000PBR

Batteries & Chargers



BATCELLCANISTER

Battery for
TL5200P Backmount / Sidemount
VTL8000P Backmount / Sidemount



BATCELL18650x4SUPREME

Battery for TL3800P Supreme



BATCELL21700x8

Battery for VL36000P /
CB30000P II / VL33000PBR



BATCELL60000

Battery for VL65000P /
CB60000P



BATCHR60000

Charger for VL65000P /
CB60000P



BATCHR21700x8

Charger for VL36000P /
CB30000P II / VL33000PBR



BATCHR18650x7

Charger for VL18000P Pro Mini /
VL18000P Pro Mini Tri Color /
CB15000P / TL8000P / VL18000PBR /
CB15000PBR



BATCHR21700x4

Charger for CB7200P /
CB10000P / CB7200PB /
CB10000PBR



BATCHR18650x3

Charger for CB4000P



BATCHR18650x4

Charger for VL11000P /
VTL8000P / TL5200P / VL9000P
Tri Color / VTL8000P Max /
VL10000PBR / VTL10000P



BATCHR18650x4 SUPREME

Charger for TL3800P Supreme



BATCHR32650/26650

Charger for
Black Molly IV / Black Molly V /
VTL2600P / TL2600P /
Black Molly VB



BATCHRCANISTER

Charger for
TL5200P Backmount / Sidemount
VTL8000P Backmount / Sidemount



BATCHR18650

Charger for AL1300NP /
AL1300WP / AL1300XWP /
AL1300NP Tail / CF1200P II /
AL1200RAFO / HL1000XW /
HL1000N / RGBWhite II /
AL1200NP IR / AL1200VWP IR /
AL1300 Strobe



BATCHRUSB

Charger for VL4600P /
VTL4200P / TL3800P /
VL4600PB / AL1800NP II /
AL1800WP / CF1800P /
BATCELL18650 /
BATCELL26650 /
BATCELL32650

Accessories



AF 55

Ambient filter for
VL11000P / VL10000PBRC /
VL9000P Tri Color
For 10-15 meter depth



AF 63

Ambient filter for
CB7200P / CB7200PB /
CB10000P /
CB10000PBRC
For 10-15 meter depth



AF 70

Ambient filter for
VL18000P Pro Mini /
VL18000P Pro Mini Tri Color /
VL18000PBRC / CB15000P /
CB15000PBRC
For 10-15 meter depth



AF 85

Ambient filter for
VL36000P / VL33000PRC /
CB30000P II
For 10-15 meter depth



AF 55-LB

Ambient filter for
VL11000P / VL10000PBRC /
VL9000P Tri Color
For 5-10 meter depth



AF 63-LB

Ambient filter for
CB7200P / CB7200PB /
CB10000P /
CB10000PBRC
For 5-10 meter depth



AF 70-LB

Ambient filter for
VL18000P Pro Mini /
VL18000P Pro Mini Tri Color /
VL18000PBRC / CB15000P /
CB15000PBRC
For 5-10 meter depth



AF 85-LB

Ambient filter for
VL36000P / VL33000PRC /
CB30000P II
For 5-10 meter depth

CONTROLLER

Remote Control for VL33000PRC /
VL18000PBRC / CB15000PBRC /
VL10000PBRC / CB10000PBRC



2M OPTICAL FIBRE

2 Meters Optical fibre for VL33000PRC /
VL18000PBRC / CB15000PBRC /
VL10000PBRC / CB10000PBRC



OPTICAL FIBRE

1 Meter Optical fibre for VL33000PRC /
VL18000PBRC / CB15000PBRC /
VL10000PBRC / CB10000PBRC



TLGGLOVE

Goodman glove for any light with a
two-prong mounting square



NPGGLOVE

Neoprene glove for Mini Light



NPGGLOVE

Neoprene glove for
AL1300NP / AL1300WP /
AL1300XWP / AL1300NP Tail /
AL1300WP Tail / AL1200NP IR /
AL1200WP IR



PISTOLGRIPHANDLE

Pistol Grip Handle for any light with
a two-prong mounting square



GHA-01C

Goodman handle with connector for
any light with a two-prong mounting
square



SFGHA-01C

Slim Fit Goodman handle with connector
for any light with a two-prong mounting
square

**LNTHANDLE**

Lantern style handle

**FILFLUORO15000**

Fluorodive filter for CB15000P / VL18000P Pro Mini / VL18000P Pro Mini Tri Color

**FDMASKYL**

Yellow filter for Fluorodiving

**YELLOW PLATE**

Yellow plate for Fluorodiving

**SNOOT 35**

Snoot Connector for AL1300WP / AL1300XWP / AL1300WP Tail / RGB White II / AL1800WP

**SNOOT 38**

Snoot Connector for AL1200WP / AL1200XWP / AL1200WP Tail / RGB White

**SNOOT 55**

Snoot Connector for VL6000P

**SNOOT 63**

Snoot Connector for CB7200P / CB10000P / CB7200PB / CB10000PBRC

**FILRED35**

Red filter for AL1300WP / AL1300XWP / AL1300WP Tail / AL1800WP

**FILREDSM**

Red filter for AL1200WP / AL1200XWP / AL1200WP Tail

**FILRED63**

Red filter for VTL10000P

**FILREDNP**

Red filter for AL1300NP / AL1300NP Tail

**FILREDHLN**

Red filter for HL1000N / HL450N

**FILYELLG**

Yellow filter for VTL4200P / VL1000P / VL10000PBRC

**FILYEL35**

Yellow filter for AL1300WP / AL1300XWP / AL1300WP Tail / Black Molly V / Black Molly VB / AL1800WP

**FILYEL44**

Yellow filter for VL4600P / VL4600PB / VTL2600P

**FILYEL63**

Yellow filter for VTL8000P / VTL8000P Backmount / Sidemount / VTL8000P Max / VTL10000P

**FILYELSM**

Yellow filter for AL1200WP / AL1200XWP / AL1200WP Tail / Black Molly III

**CLIPMNTSPOT**

Mounting clip for Green Spot Light / Red Spot Light

**CLIPMNTAL**

Mounting clip for AL1300WP / AL1300XWP / CF1200P II / AL1200WP IR

**CLIPMNTCF**

Mounting clip for CF450M / AL450WM Tail / AL1300WP Tail

**GO PRO MOUNT**

Go Pro Mount for Go Pro Camera

**1" BALL JOINT**

1" Ball Joint fit for any light with a two-prong mounting square

**SPRING CORD**

Length: 330mm

**EASY RELEASE MOUNT**

Easy Release Mount fit for helmet / DPV

**NPHOODMS**

Neoprene hood for one light holster

**NPHOODMD**

Neoprene hood for two light holster

**NPRPOUCH**

Neoprene pouch with retractor for AL1300NP / AL1300WP / AL1300XWP / AL1300NP Tail / AL1300WP Tail / AL1200NP / AL1200WP

**NPRPOUCHM**

Neoprene pouch with retractor for Mini Light

Accessories

Outdoor Dry Bags



3L	5L	7L	15L	20L
Dia. 140 x L. 330 mm	Dia. 170 x L. 380 mm	Dia. 180 x L. 510 mm	Dia. 240 x L. 540 mm	Dia. 240 x L. 600 mm
Available in 5 colors Yellow, Green, Pink, Light Blue, Blue	Available in 5 colors Yellow, Green, Pink, Light Blue, Blue	Available in 6 colors Yellow, Green, Pink, Light Blue, Blue, Black	Available in 5 colors Yellow, Green, Blue, Black, Orange	Available in 5 colors Yellow, Green, Blue, Black, Orange

Easy Release Mount Series



Photo/Video Arms & Accessories

Float Arms Series



9 inch Float Arm

Dia. 70 x 228mm
Weight above water : 281g
Buoyancy lift : 360g



9 inch Jumbo Float Arm

Dia. 90 x 228mm
Weight above water : 349g
Buoyancy lift : 697g



13 inch Float Arm

Dia. 70 x 330mm
Weight above water : 430g
Buoyancy lift : 612g

Flexi Arms Series



7 inch Flexi Arm



9 inch Flexi Arm



6 inch Flexi Arm
Hot Shoe YS Adapter



6 inch Flexi Arm
Hot Shoe Ball Adapter



YS Adapter

Photo/Video Arms & Accessories

Clips

- Made of T6061 grade aluminum
- Available in 3 versions: long double clip, double clip and a triple clip
- Ergonomic handle makes it easy to twist on and off



Long CLP02 Double clip

Length : 80mm


CLP 02 Double clip

Length : 63mm

CLP 03 Triple clip

Arms

- Full T6061 grade aluminum
- Available in 4 lengths: 5", 8", 12", 16"

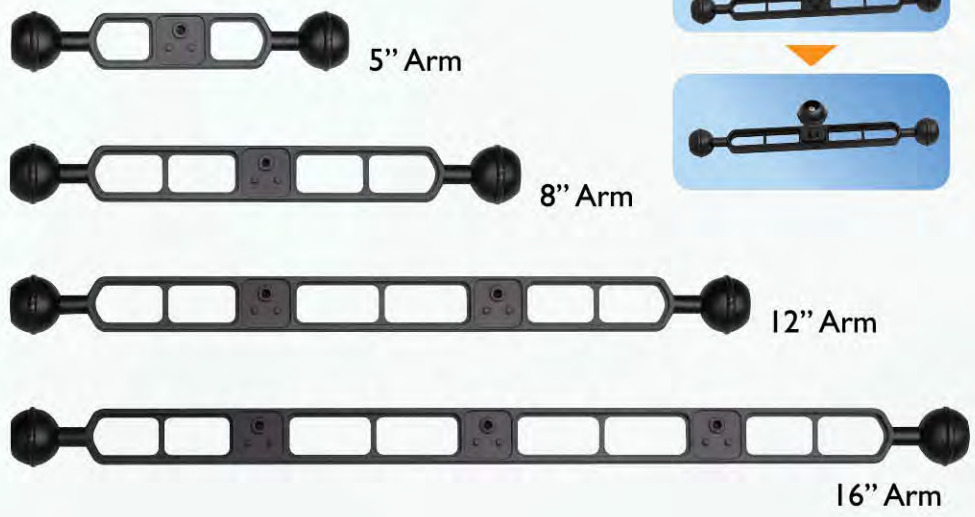

For 1" ball joint to connect to extend the connection

DA Series



Specifications subject to change without prior notice.



highblue®

Lifestyle

OUTDOOR ADVENTURE GEAR



30L Backpack
Camouflage

Size : Dia. 270 x L.670 mm
Available in 3 colors
Camo Blue, Camo Brown,
Camo Green



3L Outdoor Dry Bag
Camouflage

Size: Dia. 140 x L.330 mm
Available in 3 colors
Camo Blue, Camo Brown,
Camo Green



Sport Water Bottle

Size: Dia. 80 x L.273 mm
Volume: 800mL (27 oz)
Weight : 360g
Available in 2 colors
Black, Blue

Our Distributors & Dealers



Aruba / Bonaire / Curacao Distributor : Palm Trading Bonaire NV

Contact Person : Joyce Sonneveld
E-mail : sales@palmtradingnv.com
Phone : 599 717 2072
Mail : Hanchi Amboina 5, Kralendijk
Bonaire Dutch Caribbean



Australia Distributor : Adreno

Contact Person : Clive Lewis
E-mail : clive@adreno.com.au
Phone : 61-07-3391-2299
Mail : 54-58 Deshon Street, Woolloongabba,
Brisbane, QLD 4102, Australia



Austria Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 0 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



Belgium/ Netherlands / Luxembourg Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 0 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



Brazil Distributor : Seasub

Contact Person : Pablo Y. Varela
E-mail : pablo@seasub.com.br
Phone : 55-11-38328342
Mail : Rua Baumann, 1039/1051,
Cep 05318000,
Sao Paulo, Brazil



Canada Distributor : Pacific Scuba Industries

Contact Person : Michael Joseph &
Laura Valente
E-mail : laurabigblue@outlook.com
Phone : 778-834-0184
Mail : Unit A11-33733 King Road
Abbotsford, BC,
V2S 7M9, Canada



Czech Republic Distributor : Olson S.R.O

Contact Person : Sales Office
E-mail : olson@olson.cz
Phone : 420 220 805 300
Mail : Bubenske Nabrezi 306/16 ,
Holesovicka Trznice – Hala 16
170 00, Prague 7
Czech Republic



France / Europe Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



Germany Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



Greece / Croatia Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



Indonesia Distributor : DiveSea Indonesia

Contact Person : Chatra Hapsoro
E-mail : bigblue.id@gmail.com
Phone : 62-82145490450
Mail : Metro Park Residence, Unit MA-LG-05,
JL. Pilar Mas Utama Raya Kav 28,
Kebon Jeruk, Jakarta Barat 11520 Indonesia



Italy/ Malta Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



Japan Distributor : Zero Co., Ltd.

Contact Person : Katsuhiko Saotome
E-mail : zero@zero-zero.co.jp
Phone : 81-3-5721-1906
Fax : 81-3-5721-1910
Mail : 1-11-5 Takaban, Meguro-Ku,
Tokyo, Japan



Korea Distributor : King Sports

Contact Person : Mr. Chang / Yun Hee Chang
E-mail : kingdive@kingsports.co.kr
Phone : 82-2-3628251
Mail : 35-4, 1GA, Manri-Dong, Chung-Gu,
Seoul, Korea



Kuwait Dealer : Ilmunz Marine Co.

Contact Person : Abdulrahman Al-Serheed
E-mail : ilmunz@ilmunz.com
Phone : +965 95500969
Mail : Creative Design Center , Block 1 , Street 10,
Building 63, Store 2.2,
Shuwaikh Industrial 1, Kuwait



Malaysia Distributor : Rainbow Runner Sdn Bhd

Contact Person : Sim
E-mail : ops@rainbowrunner.net
Phone : 60-341-622837
Fax: 60-341-617837
Mail : 5, Ukay Boulevard, Jalan Lingkaran
Tengah 2,Hulu Kelang, 68000 Ampang,
Selangor, Malaysia



Maldives Dealer : Sea Gear

Contact Person : Hussien Abdulla
E-mail : sales@seagear.com.mv
Phone : +960 3302737
Mail : M. Araliya – Ground Floor – Alhivilaa Magu,
20292 Male, Maldives



Mexico Distributor : Comercializadora UNIF Sa De CV

Contact Person : Tristan Termat
E-mail : tristan@unifmexico.com.mx
Phone : + 52 984 80 311 68
Mail : Calle 4 nte Mza 42 Lote 4-1 Local B Entre
25 y 30 Avenida Col. Centro Localidad :
Playa del Carmen,Q. Roo Municipio :
Solidaridad CP: 77710 Mexico



New Zealand Distributor : Sea Tech Ltd.

Contact Person : Dave Moran
E-mail : info@seatech.co.nz
Phone : 64-9-5210684
Mail : 47 Tautari St. Orakei, Auckland 1071,
New Zealand



Philippines Distributor : Dive Supply Subic, INC.

Contact Person : Rowena Merto
E-mail : muriel@aquaventurewhitetip.com
Phone : 63-2-708-9996
Mail : Office 6&7 EMS Building, 14th Street
Subic Gate Perimeter Road, Subic Bay
Freeport Zone, Olongapo City,
2222 ,Philippines



Poland Distributor : Waterfall

Contact Person : Darek
E-mail : darek@waterfall.pl
Phone : 48-600-340-002
Mail : UL. Klimczaka 22D/3, 02-797 Warszawa
Poland PL 7621470585



Scandinavian Distributor : AquaFun AB

Contact Person : Sales Office
E-mail : info@aquafun.se
Phone : 46-0-40-295-300
Mail : Sangleksgatan 4E, 215 79, Malmö,
Sweden



Singapore Distributor : DiveSea Pte Ltd

Contact Person : Fairuz Ahmad
E-mail : team@divesea.com.sg
Phone : 65-85115164
Mail : 90 Lor 23 Geylang
Agrow Building # 01-03
Singapore 388393



South Africa Distributor: Manex & Power Marine

Contact Person : Gavin Jones
E-mail : gavin.jones@manex.co.za
Phone : 27-021-511-7292
Mail : 9 Paarden Eiland Road, Paarden Eiland,
South Africa



Spain/ Portugal Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



Switzerland Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 0 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



Russia Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : + 33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



Taiwan Distributor : Indigo Blue Technology Co. Ltd.

Contact Person : Rachel Cheng
E-mail : rachel.cheng@weistech.com.tw
Phone : 886 2 82271619
Mail : 4F-6, No. 258 Lian Cheng Road,
Chung Ho Dist., New Taipei City 23553
Taiwan, ROC



Turkey Distributor : K Pro Doga Sporlari Malzemeleri Tic. Ltd. STI

Contact Person : Akin Kaftanoglu
E-mail : akinkaftanoglu@yahoo.com
Phone : 90-3124334479
Mail : Bulbulderesi Cad. No.: 23/A, Seyranbaglari,
Ankara,Turkey



U.A.E. Distributor : Senyar Marine Equipment

Contact Person : Abdulla Ai Kindi
E-mail : senyar7@gmail.com
Phone : 971-2-666-9999
Mail : P.O. Box 112790, Abu Dhabi, U.A.E.



United Kingdom / Ireland Distributor : Liquid Sports Ltd.

Contact Person : Alastair Ansell
E-mail : alastair@liquidsports.co.uk
Phone : 44-0-7585-935522
Mail : 11 Stag Lane, Berkhamsted,
Hertfordshire, HP4 1FJ, UK

bigblue®

THE BRIGHTER IDEA

Headquarters :**Bosk International Company Limited**

Contact Person : Oscar Tong

E-mail : oscar@bigblue.com.hk

Phone : 852-3568-0773

Fax: 852-3998-3127

Mail : Room 818.8/F, Po Yip Building, 23. Hing Yip
Street, Kwun Tong, Hong KongWebsite : www.bigbluelights.comwww.bigblue.com.hk**US Sales Office : BoskUSA / Bigblue Dive Lights**

Contact Person : Tim Ratcliffe

E-mail : sales@bigbluedivelights.com

Phone : 727-442-2300

Fax: 727-499-7117

Mail : 1710N Hercules Ave, Suite 103, Clearwater,
FL 33765 USAVisit Us
on Website Like Us
on Facebook 